



bamboox-treme® decking accessories



MOSO® fastener and screw


With these fasteners Bamboo X-treme decking can be easily installed. When installed correctly there will be 5-6mm gaps between the boards. The fastener is supplied with matching stainless steel screws (square bit).

Product Code	Item	Material	Color	Dimensions (mm)
CLIP-SCREW-BX03	Fastener	Stainless steel A2 (AISI304)	Brown	27x22.5x10.8
	Screw	Stainless steel A2 (AISI304)	Brown	4.5x30

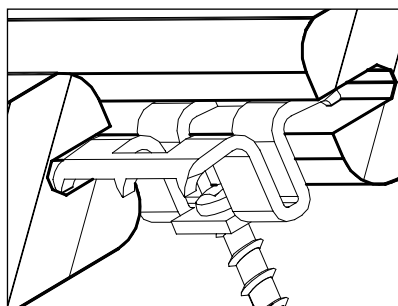

Advised number of fasteners/m²*


137 mm
-20 pcs/m²
155 mm
-17 pcs/m²
178 mm
-14 pcs/m²

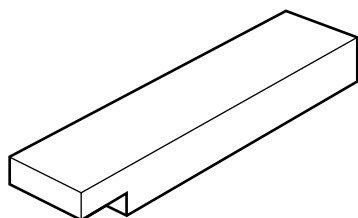

sub frame joists

The Bamboo X-treme sub frame joists are made of the same material as the decking boards: high density heat treated bamboo.


Product Code	Material	Finish	Dimensions (mm)
BO-SB150	High density heat treated bamboo	Unfinished	2440x70x40

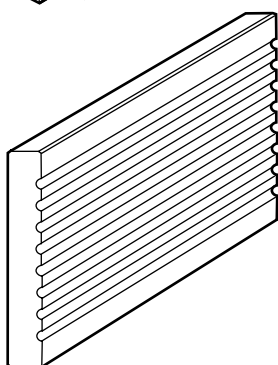

endprofile

The BO-DTHT162 is an endprofile for an elegant finish of the sides of the decking. It is placed vertically against the sides of the terrace to cover the sub frame.

Product Code	Material	Finish	Dimensions (mm)
BO-DTHT162	High density heat treated bamboo	Unfinished	1850x137x20




broom stick and disk

the silicium carbid broom and machine disk are perfectly suited to clean and smoothen the decking surface of Bamboo X-treme and to remove splinters due to the capability to sand the surface in addition to cleaning it.

Product Code	Material
Disk-01	16" Silicium carbid disk

Product Code	Material
Broom-01	Silicium carbid broom

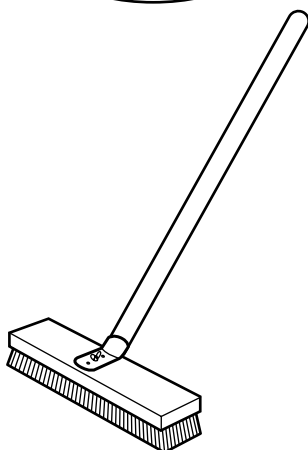

*) Based on distance of 462.5mm between the sub beam axes.